



10/549672

FIG. 1

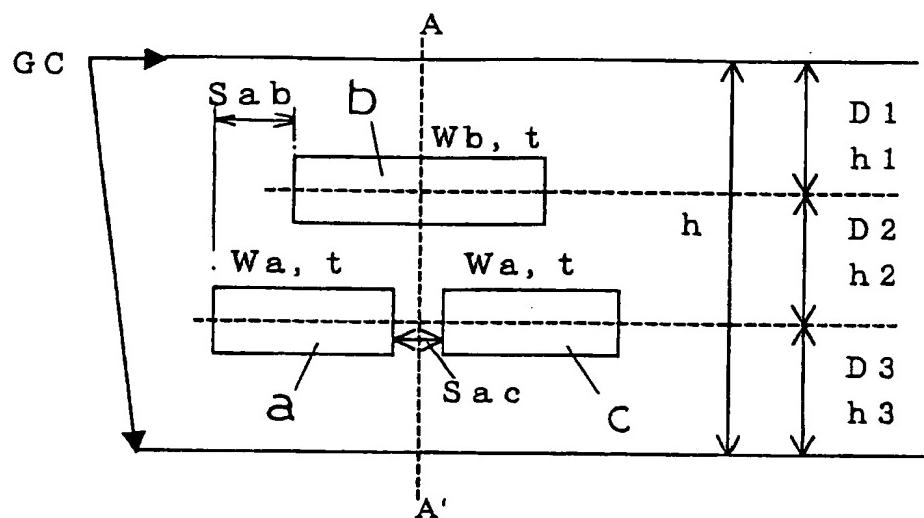


10/549672

FIG. 2

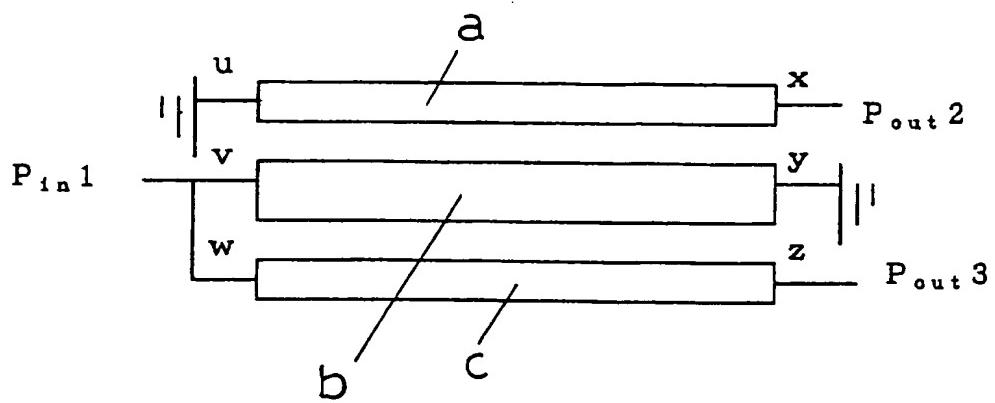

10/549672


FIG. 3

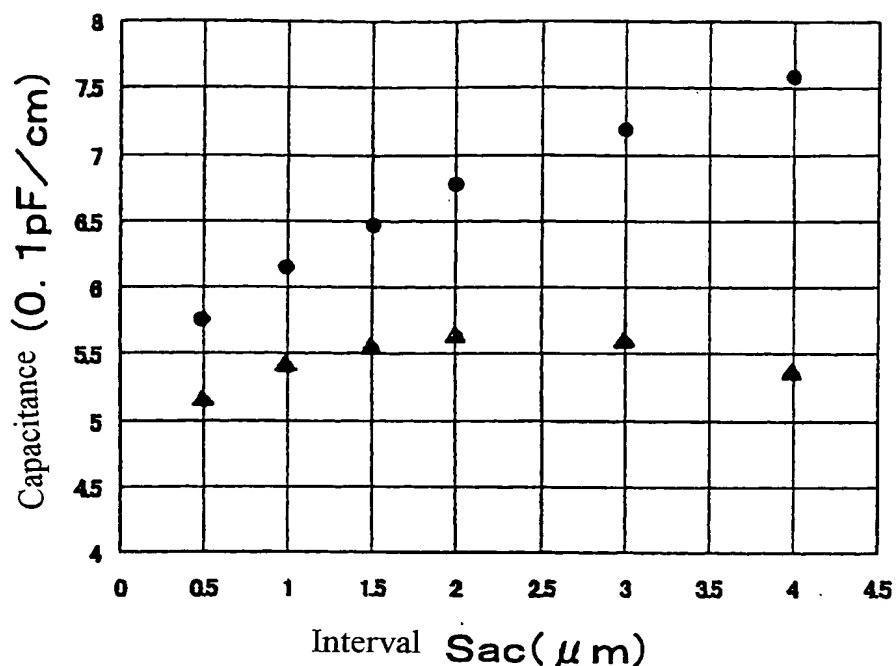

● Ca
▲ Cab


10/549672

FIG. 4

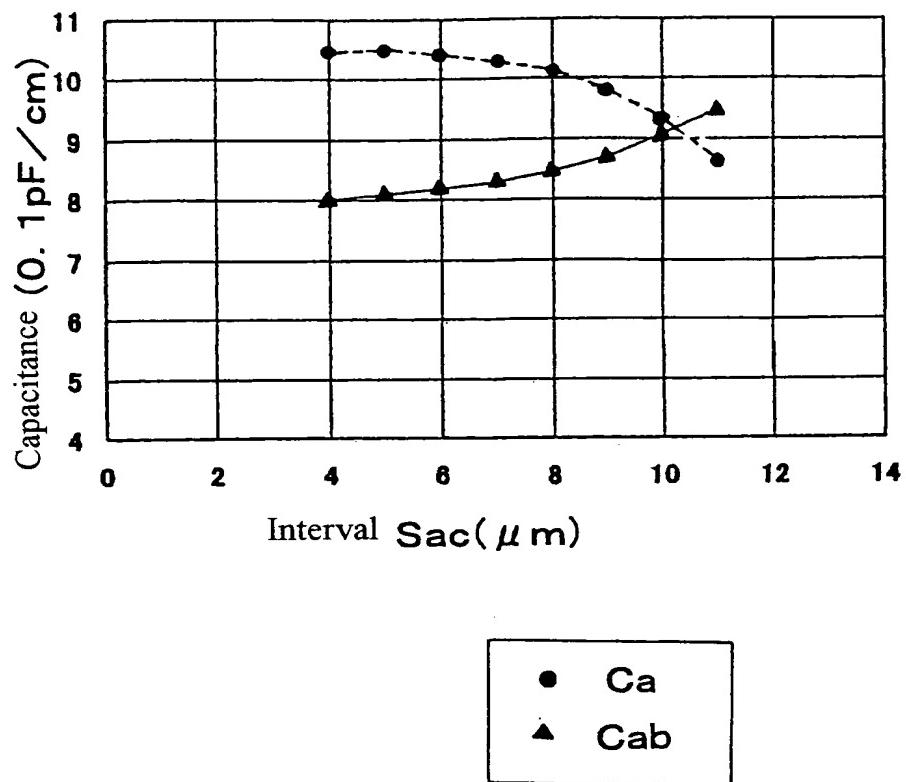


10/549672

FIG. 5

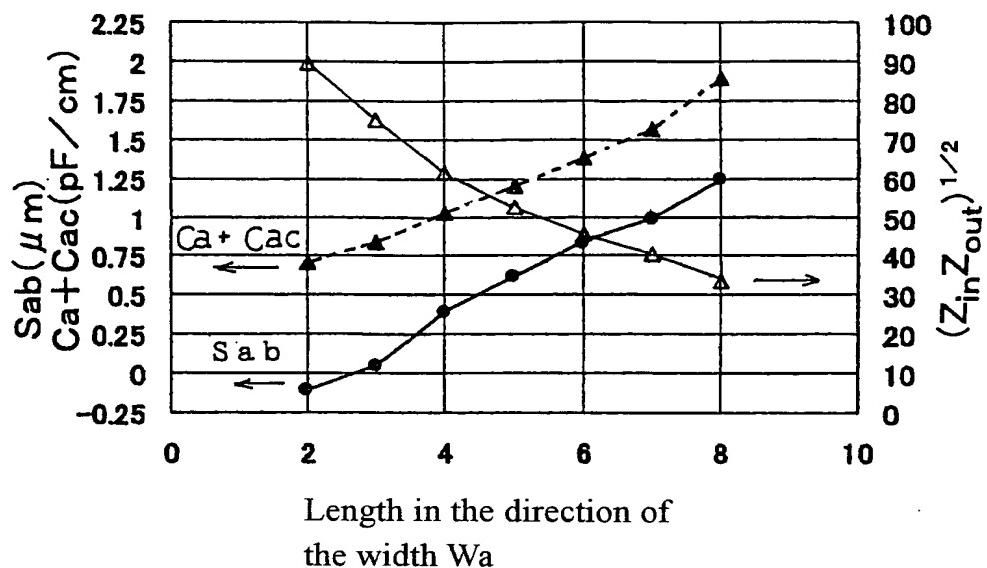

10/549672


FIG. 6

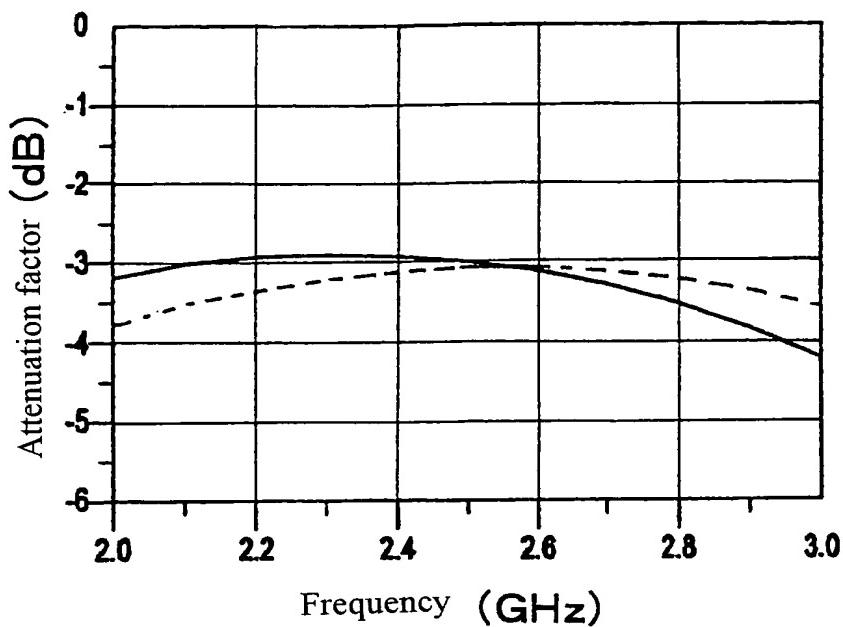

— Permeability to output terminal 2 (S_{21})
- - - Permeability to output terminal 3 (S_{31})


10/549672

FIG. 7

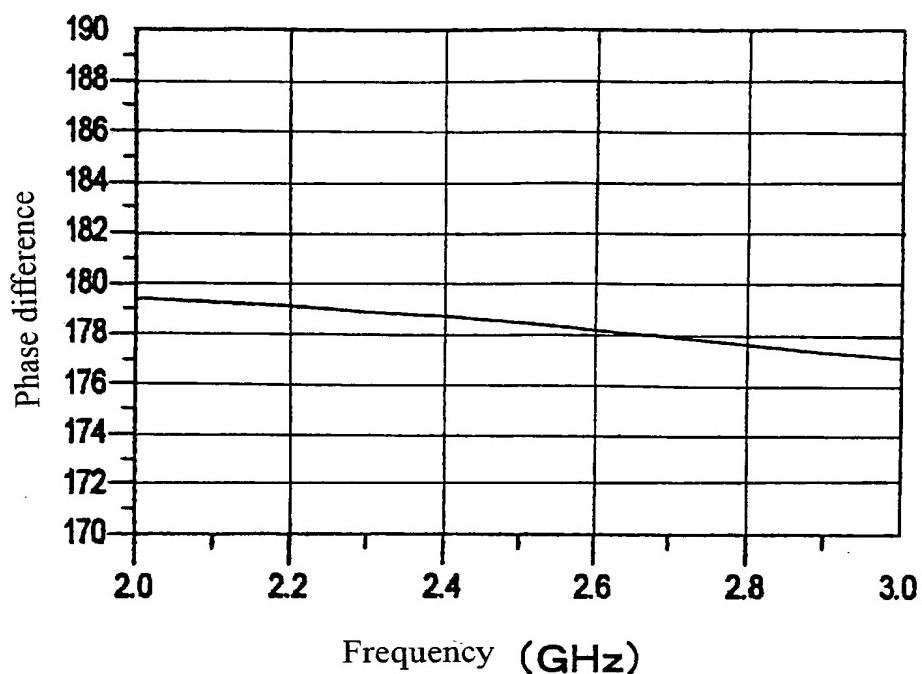

10/549672

FIG. 8

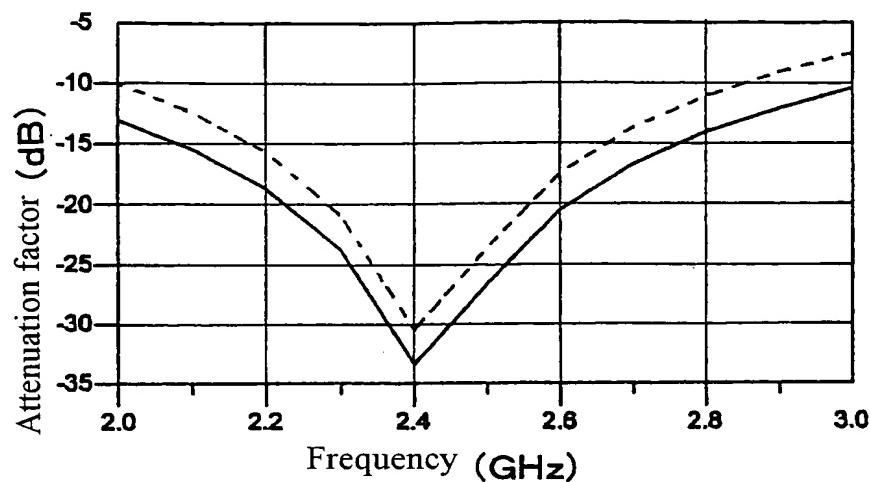

----- Reflection loss for input terminal 1 (S_{11})

— Reflection that occurs when
differential amplitude is provided
to output terminal 2 and output terminal 3